

# WA Range




## WALL/WINDOW AXIAL FANS

- For wall, panel, ceiling or window
- Three sizes
- Energy efficient




- New design to complement contemporary decor.
  - To exhaust air directly to the outside or into a short length ducting (max 3 m length).
  - Suitable for toilets, bathrooms, shower-rooms, utility rooms and kitchens.
  - For wall, panel, ceiling and window installation (window kit upon request).
  - 4"/100mm, 5"/120mm, 6"/150mm sizes
  - Silent opening and closing delay action automatic shutters
  - Indicator light to show when fan is operating
  - Manufactured in shock-proof high quality technopolymer.
  - Maintenance free, self lubricating sleeve bearing motor for long life and noiseless running.
  - Impedance protected induction motor 230v 50Hz.
  - Easy maintenance and cleaning.
  - Designed to ensure energy saving.
  - Fans comply with EN 60335-2-80, EC Low Voltage Directive 73/23 - 93/68 and EC Directive EMC 89/336.
  - Splashproof, CE Marked, Double Insulated
- Options:**
- Timer (adjustable from 3 to 25 minutes)
  - Humidity control (40 - 80 R.H.)
  - **SELV** (Safety Extra Low Voltage)

### DIMENSIONS

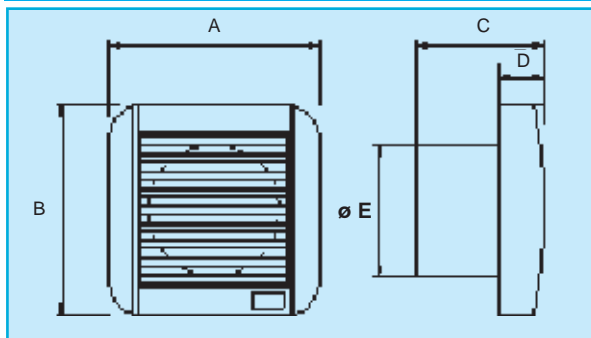

Model	A	B	C	D	ø E	kg
100's	155	155	92	35	97	0.5
120's	180	180	121	51	119	0.8
150's	209	209	137	52	149	1.2

### SPECIFICATIONS

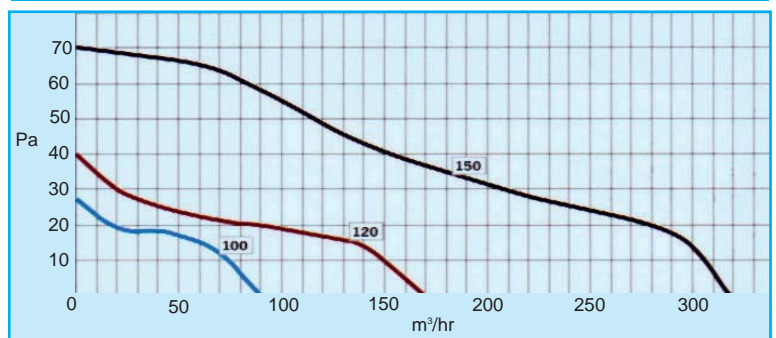


Model	m³/hr	Pa	W	dBa @3m	Splashproof
100's	54	18	11	39	yes
120's	108	19	15	42	yes
150's	216	28	26	49	yes




MARKETING DIVISION  
International House, Peartree Road,  
Stanway, Colchester, Essex CO3 0JL  
Tel: +44 (0)1206 713800  
Email: enquiries@titon.co.uk Web: www.titon.com

BM615 iss02

#### Wall Installation



#### Window Installation

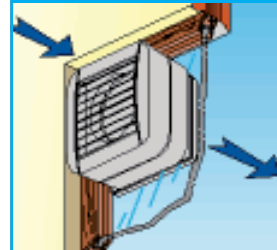

#### Ceiling Installation

